



MACHINE, EQUIPMENT AND RACK GUARDS

PROVIDE PROTECTION FOR EXPENSIVE MACHINERY, RACK SYSTEMS AND PERSONNEL

MECO OMAHA Machine Guards are manufactured from hefty 4½" diameter x 11 ga. wall tubing. Select Lo-Profile, Hi-Profile or Corner Pipe Guard models. Corner Pipe Guards with a 90° bend provide excellent protection to the edge of buildings.

All models employ a double welded ¼" x 8" x 8" steel base plate with four 7/8" x 1¼" slotted holes for secure mounting. Anchoring hardware is NOT provided.

All units are finished in a high visibility yellow powder coat and ship economically as freight class 50.

• LO-PROFILE PIPE GUARDS

MODEL NO.	HEIGHT	LENGTH	WEIGHT
LPPG936	9"	36"	49 lbs.
LPPG948		48"	62 lbs.
LPPG1636	16"	36"	66 lbs.
LPPG1648		48"	76 lbs.


• HI-PROFILE PIPE GUARDS

MODEL NO.	HEIGHT	LENGTH	WEIGHT
HPPG2436	24"	36"	54 lbs.
HPPG2448		48"	71 lbs.
HPPG3636	36"	36"	76 lbs.
HPPG3648		48"	85 lbs.
HPPG4236	*42"	36"	92 lbs.
HPPG4248		48"	96 lbs.

*42" high models employ a 1½/16" diameter midrail for additional strength and protection.

• CORNER PIPE GUARDS

MODEL NO.	HEIGHT	LEG 1	LEG 2	WEIGHT
CPG2424	24"	24"	24"	70 lbs.
CPG2430		30"	30"	75 lbs.
CPG3624	36"	24"	24"	84 lbs.
CPG3630		30"	30"	90 lbs.
CPG4224	42"	24"	24"	93 lbs.
CPG4230		30"	30"	98 lbs.

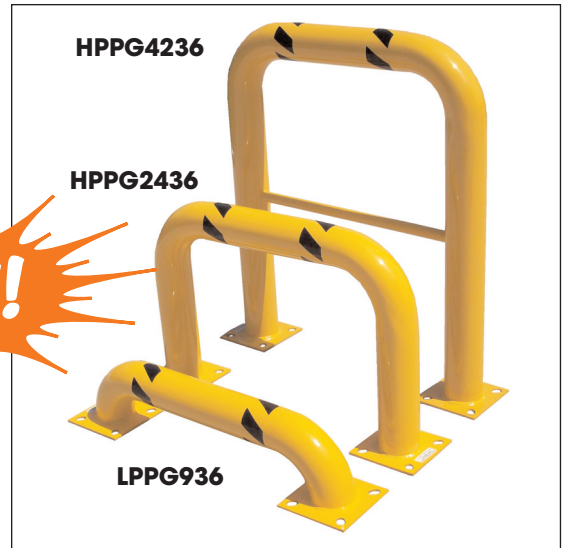

CPG4224

STEEL SAFETY BOLLARDS

ELIMINATE IMPACT DAMAGE FROM MOTORIZED VEHICLES

MECO OMAHA Steel Safety Bollards are available in popular heights of 24", 36" or 42" and 4½" or 5½" diameter tubing - both with 11 ga. wall. For the most demanding protection, the removable plastic cap permits the tube to be filled with concrete.

All models employ a double welded ¼" x 8" x 8" steel base plate with four 7/8" x 1¼" slotted holes for secure mounting. Anchoring hardware is NOT provided.

All units are finished in a high visibility yellow powder coat and ship economically as freight class 50.

• SAFETY BOLLARDS

MODEL NO.	DIAMETER	HEIGHT	WEIGHT
BOL4-5-24	4½"	24"	35 lbs.
BOL5-5-24	5½"		43 lbs.
BOL4-5-36	4½"	36"	47 lbs.
BOL5-5-36	5½"		59 lbs.
BOL4-5-42	4½"	42"	53 lbs.
BOL5-5-42	5½"		72 lbs.



BOL4-5-24